


RCCN 日成GDRFZ型易折断环保阻燃线槽 Narrow Slot Wiring Duct




产品材质:采用低卤素硬质PVC料制成,环保无污染,不含铅等有毒物。
 产品认证:美国UL:E306674 欧洲CE:EN50085 欧洲环保RoHS,REACH。
 防火等级:UL94V-0,低烟微卤,遇火不燃烧,防火性及绝缘性特佳。
 产品构造:由槽底及槽盖组成,底槽两侧设有出线孔。
 颜色:灰色.白色.蓝色.黑色 (可定制其它颜色,有起订量要求)
 工作温度:静态-40°C持续高温至65°C,短时间可达85°C。
 使用方法:先将底槽固定,将所要配的线装入槽内,盖上槽盖即可。
 产品特性: 1.反扣式槽盖与槽体设计组合后绝不脱落,且接合面平滑,不割伤手及擦损附近配线。
 2.配线槽65°C内不易断裂,变形,变色,装配省时便利。
 3.出线孔低、组合容易、拆卸简单、易于配线。
 4.易折断型为内部两侧带折痕设计,可依安装者需求,折出需要的边孔大小。更多选择:量大可按需求生产所需规格或定制长度。
 例:GDR8080FZ2(L=1.7M)

Wide slot/finger design provides greater sidewall rigidity and can be used with a wide range of wire bundle sizes.
 Certificates:UL:E306674
 CE:EN50085 RoHS,REACH.
 Made of rigid PVC
 Work Temperature:-40°C to 65°C
 UL94 Flammability Rating of V-0
 Provided with mounting holes
 Available color:gray.white.blue.black and other special colors
 Special design: with score line at the base of trunking, it makes the fingers easy to separate from the trunking no need to us cutter.

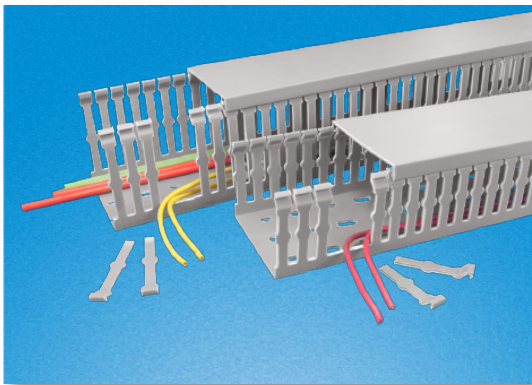

推荐:灰色为常规库存产品,其它颜色有起订量要求。
 Comment:gray is standard color,other color come with MOQ.

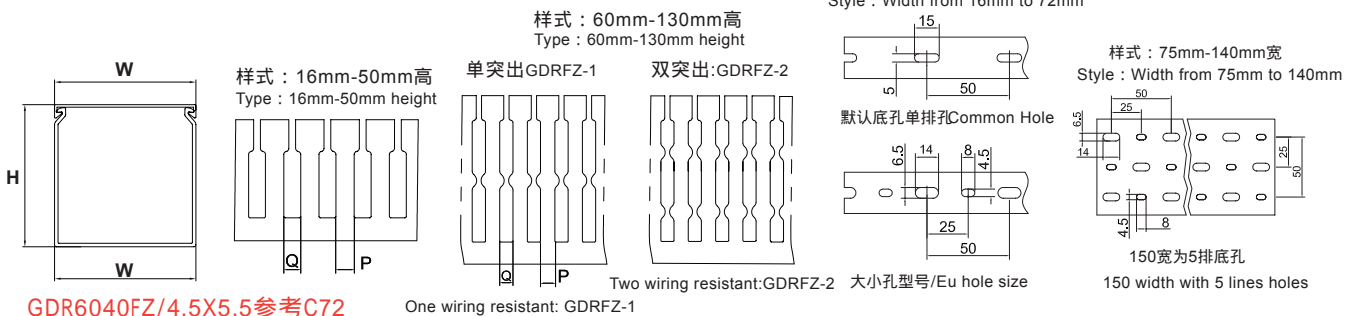


单位/Unit:mm

型号 Item No.				宽×高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005					
GDR2025FZ	GDR2025FZW	GDR2025FZE	GDR2025FZB	20×25	6	6.5	5~15pcs	每支 2米
GDR2525FZ	GDR2525FZW	GDR2525FZE	GDR2525FZB	25×25	6	6.5	10~25pcs	
GDR3025FZ	GDR3025FZW	GDR3025FZE	GDR3025FZB	30×25	6	6.5	12~28pcs	含槽底槽盖
GDR4025FZ	GDR4025FZW	GDR4025FZE	GDR4025FZB	40×25	6	6.5	20~35pcs	
GDR5025FZ	GDR5025FZW	GDR5025FZE	GDR5025FZB	50×25	6	6.5	25~40pcs	Pcs/Branch 2M
GDR2540FZ	GDR2540FZW	GDR2540FZE	GDR2540FZB	25×40	6	6.5	20~25pcs	
GDR3540FZ	GDR3540FZW	GDR3540FZE	GDR3540FZB	35×40	6	6.5	50~60pcs	
GDR4040FZ	GDR4040FZW	GDR4040FZE	GDR4040FZB	40×40	6	6.5	60~70pcs	
GDR6040FZ	GDR6040FZW	GDR6040FZE	GDR6040FZB	60×40	6	6.5	100~115pcs	
GDR8040FZ	GDR8040FZW	GDR8040FZE	GDR8040FZB	80×40	6	6.5	120~135pcs	
GDR10040FZ	GDR10040FZW	GDR10040FZE	GDR10040FZB	100×40	6	6.5	120~135pcs	

RCCN 日成GDRFZ型易折断环保阻燃线槽 Narrow Slot Wiring Duct

型号 Item No.				宽×高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005					
GDR2560FZ1	GDR2560FZ1W	GDR2560FZ1E	GDR2560FZ1B	25×60	6	6.5	40~50pcs	每支 2米 含槽底槽盖
GDR3060FZ1	GDR3060FZ1W	GDR3060FZ1E	GDR3060FZ1B	30×60	6	6.5	60~80pcs	
GDR3560FZ1	GDR3560FZ1W	GDR3560FZ1E	GDR3560FZ1B	35×60	6	6.5	90~105pcs	
GDR4060FZ1	GDR4060FZ1W	GDR4060FZ1E	GDR4060FZ1B	40×60	6	6.5	100~115pcs	
GDR4560FZ1	GDR4560FZ1W	GDR4560FZ1E	GDR4560FZ1B	45×60	6	6.5	110~120pcs	
GDR5060FZ1	GDR5060FZ1W	GDR5060FZ1E	GDR5060FZ1B	50×60	6	6.5	120~135pcs	
GDR6060FZ1	GDR6060FZ1W	GDR6060FZ1E	GDR6060FZ1B	60×60	6	6.5	120~135pcs	
GDR8060FZ1	GDR8060FZ1W	GDR8060FZ1E	GDR8060FZ1B	80×60	6	6.5	180~210pcs	
GDR10060FZ1	GDR10060FZ1W	GDR10060FZ1E	GDR10060FZ1B	100×60	6	6.5	240~290pcs	
GDR11060FZ1	GDR11060FZ1W	GDR11060FZ1E	GDR11060FZ1B	110×60	6	6.5	250~300pcs	
GDR12060FZ1	GDR12060FZ1W	GDR12060FZ1E	GDR12060FZ1B	120×60	6	6.5	260~320pcs	Pcs/Branch 2M Including truning and lids
GDR2580FZ1	GDR2580FZ1W	GDR2580FZ1E	GDR2580FZ1B	25×80	6	6.5	100~6.50pcs	
GDR3080FZ1	GDR3080FZ1W	GDR3080FZ1E	GDR3080FZ1B	30×80	8	6.5	110~6.55pcs	
GDR3580FZ1	GDR3580FZ1W	GDR3580FZ1E	GDR3580FZ1B	35×80	6	6.5	110~130pcs	
GDR4080FZ1	GDR4080FZ1W	GDR4080FZ1E	GDR4080FZ1B	40×80	6	6.5	140~160pcs	
GDR4580FZ1	GDR4580FZ1W	GDR4580FZ1E	GDR4580FZ1B	45×80	6	6.5	140~160pcs	
GDR5080FZ1	GDR5080FZ1W	GDR5080FZ1E	GDR5080FZ1B	50×80	6	6.5	160~180pcs	
GDR5580FZ1	GDR5580FZ1W	GDR5580FZ1E	GDR5580FZ1B	55×80	6	6.5	160~180pcs	
GDR6080FZ1	GDR6080FZ1W	GDR6080FZ1E	GDR6080FZ1B	60×80	6	6.5	180~210pcs	
GDR8080FZ1	GDR8080FZ1W	GDR8080FZ1E	GDR8080FZ1B	80×80	6	6.5	240~290pcs	
GDR10080FZ1	GDR10080FZ1W	GDR10080FZ1E	GDR10080FZ1B	100×80	6	6.5	260~350pcs	每支 2米 含槽底槽盖
GDR12080FZ1	GDR12080FZ1W	GDR12080FZ1E	GDR12080FZ1B	120×80	6	6.5	280~380pcs	
GDR14080FZ1	GDR14080FZ1W	GDR14080FZ1E	GDR14080FZ1B	140×80	6	6.5	350~450pcs	
GDR2580FZ2	GDR2580FZ2W	GDR2580FZ2E	GDR2580FZ2B	25×80	6	6.5	100~6.50pcs	
GDR3080FZ2	GDR3080FZ2W	GDR3080FZ2E	GDR3080FZ2B	30×80	6	6.5	110~6.55pcs	
GDR3580FZ2	GDR3580FZ2W	GDR3580FZ2E	GDR3580FZ2B	35×80	6	6.5	110~130pcs	
GDR4080FZ2	GDR4080FZ2W	GDR4080FZ2E	GDR4080FZ2B	40×80	6	6.5	140~160pcs	
GDR4580FZ2	GDR4580FZ2W	GDR4580FZ2E	GDR4580FZ2B	45×80	6	6.5	140~160pcs	
GDR5080FZ2	GDR5080FZ2W	GDR5080FZ2E	GDR5080FZ2B	50×80	6	6.5	160~180pcs	
GDR5580FZ2	GDR5580FZ2W	GDR5580FZ2E	GDR5580FZ2B	55×80	6	6.5	160~180pcs	
GDR6080FZ2	GDR6080FZ2W	GDR6080FZ2E	GDR6080FZ2B	60×80	6	6.5	180~210pcs	Pcs/Branch 2M Including truning and lids
GDR8080FZ2	GDR8080FZ2W	GDR8080FZ2E	GDR8080FZ2B	80×80	6	6.5	240~290pcs	
GDR10080FZ2	GDR10080FZ2W	GDR10080FZ2E	GDR10080FZ2B	100×80	6	6.5	260~350pcs	
GDR12080FZ2	GDR12080FZ2W	GDR12080FZ2E	GDR12080FZ2B	120×80	6	6.5	280~380pcs	
GDR25100FZ2	GDR25100FZ2W	GDR25100FZ2E	GDR25100FZ2B	25×100	6	6.5	110~160pcs	
GDR33100FZ2	GDR33100FZ2W	GDR33100FZ2E	GDR33100FZ2B	33×100	6	6.5	130~165pcs	
GDR40100FZ2	GDR40100FZ2W	GDR40100FZ2E	GDR40100FZ2B	40×100	6	6.5	130~175pcs	
GDR50100FZ2	GDR50100FZ2W	GDR50100FZ2E	GDR50100FZ2B	50×100	6	6.5	220~250pcs	
GDR60100FZ2	GDR60100FZ2W	GDR60100FZ2E	GDR60100FZ2B	60×100	6	6.5	240~290pcs	
GDR75100FZ2	GDR75100FZ2W	GDR75100FZ2E	GDR75100FZ2B	75×100	6	6.5	260~350pcs	
GDR80100FZ2	GDR80100FZ2W	GDR80100FZ2E	GDR80100FZ2B	80×100	6	6.5	260~350pcs	
GDR100100FZ2	GDR100100FZ2W	GDR100100FZ2E	GDR100100FZ2B	100×100	6	6.5	300~400pcs	

RCCN 日成GDRFZ型易折断环保阻燃线槽 Narrow Slot Wiring Duct

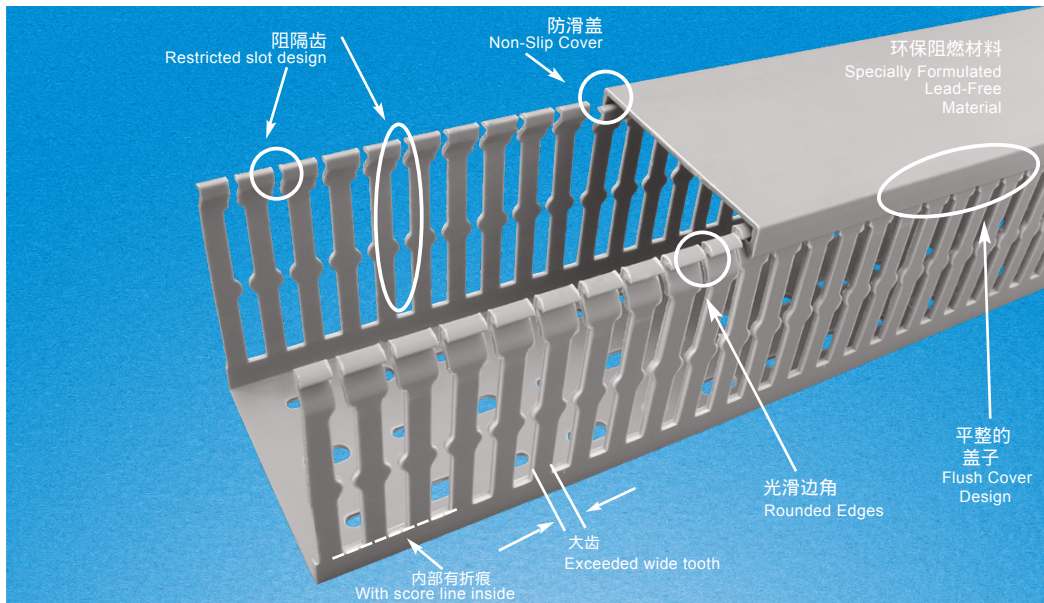

特点/Features	优点/Advantages	益处/Benefits
细的齿和中的孔 Narrow finger and slot design	较近的电器大一点的接线空间满足高密度布线 Provides closer spacing for use with high-density applications	允许更多的布线,使布线效果整体美观 Allows further fanning of wires for neater wire management in high-density control panels
环保阻燃材料 Rohs approved Environment-friendly Material	符合欧盟ROHS环保测试, 符合美国UL94V-0,良好的阻燃性 Approved by EU Rohs, Compliant with US UL 94V-0,good inflaming	环保不含有铅的PVC 不会对人体健康构成危害,材料良好阻燃性, 使明火自熄,在着火的情况下,保证安全 Eliminates health concerns associated with PVC that contains lead
易折断型结构 Smooth rounded edges	方便安装时根据需要的侧孔大小走线折断齿 Exclusive RCCN ® process rounds the edges in duct slots and at top of duct fingers	减少安装时间,断面平整美观 Protects hands and wiring/cabing from abrasion
防滑盖 non-slip liner inside duct covers)	安装时不容易滑盖 Will not slide easily when installed on duct base	防运输振动导致滑盖 防线槽垂直安装时滑盖 Cover stays in place during shipment, vibration and when in a vertical orientation,eliminating rework
平整的盖子设计 Flush cover design Greater capacity than traditional duct designs	比传统的设计有更大的空间 盖子与槽体齐平 Cover sits flush with sidewall	比老款装相同数量的电线表面更平整美观 Can potentially use a smaller size wiring duct for same number of wires Provides a neat and finished appearance
冲孔断面/Slot smooth	冲孔后齿的表面平整光滑 Smooth edge after punching	不用修毛刺,节省时间 No need to get offer abrasion, save time
阻隔齿设计 Restricted slot design Once inserted wires are retained in the slot	电线装入后不会晃动,不管是否扣盖子 也可用于电线功能不同的分类 with or without the cover being installed	安装时避免线跑出槽不必要的麻烦,节省时间 Eliminates hassle and saves time during installation and maintenance
四种颜色可选 Four different colors	可用于不同场合的安装要求。 Suitable to different environments using	项目对颜色有要求时选择范围更加的广泛更快的满足终端用户的需求。 Can meet different customers' request in different project
通过多项认证 Approved by many certificates	美国UL,加拿大CULUS, 欧盟CE ,ROHS,REACH 铁道部机车阻燃低烟认证。 America UL,Canada CULUS, Europe CE ,ROHS,REACH Flamility and low smoking certificate	满足项目应用零配件需要提供产品认证,确保产品在世界各地均可放心使用 Can provide related certificates of the projects or parts need



RCCN 日成GDRFZ型易折断环保阻燃线槽 Narrow Slot Wiring Duct

RCCN

日成GDRFZ型易折断环保阻燃线槽

Narrow Slot Wiring Duct

