


RCCN 日成MC型金属软管 Non-Jacket Metal Flexible Conduit





产品材质:热镀锌钢板及特殊绝缘处理。
 产品认证:欧洲CE,欧洲环保RoHS
 产品特性:重量较其它种类轻且价格低廉,具超柔软与极佳弯曲性能,内部平滑构造在穿引电线时极容易。
 应用领域:各种机械,大厦、厂房内等建筑之配线保护。
 使用方法:先将电线穿入管内,再配合金属软管固定头即可。
 用途:保护电线电缆以及达到绝缘,防水,并可增进线缆弯曲美观。

Material:(inner):zinc coated steel, special insulated processed.
 Certificates:CE,ROHS
 Use domain:railway,communicate project,air-dondition,machines.roboticized equipments,power plant ships and so on
 Use way:insert the cables into the conduit, then fix by the correct connectors.

单位/Unit:mm

型号Item No.	规格 Trade Sizes	内径 I.D. d	外径 O.D. D	弯曲半径 Bending Radius mm±10%	配套金属头 NBG	包装 Packing M
MC-01	ø 6 3/16"	6.0±0.3	8.2±0.5	40	NBG-01	200M
MC-02	ø 8 5/16"	8.0±0.3	11.0±0.5	45	NBG-02	200M
MC-03	ø 10 1/4"	10.0±0.3	13.0±0.5	55	NBG-03	100M
MC-04	ø 13 3/8"	12.5±0.3	15.3±0.5	65	NBG-04	100M
MC-05	ø 16 1/2"	15.5±0.3	18.5±0.5	85	NBG-05	100M
MC-06	ø 20 3/4"	20.0±0.3	23.2±0.5	100	NBG-06	50M
MC-08	ø 25 1"	25.0±0.3	29.3±0.5	120	NBG-08	50M
MC-10	ø 32 1 1/4"	32.0±0.3	36.5±0.5	165	NBG-10	25M
MC-12	ø 38 1 1/2"	38.0±0.3	43.0±0.5	180	NBG-12	25M
MC-16	ø 51 2"	50.0±0.3	56.0±0.5	190	NBG-16	25M
MC-20	ø 64 2 1/2"	62.5±0.3	72.5±0.5	250	NBG-20	10M
MC-24	ø 75 3"	73.0±0.3	83.5±0.5	320	NBG-24	10M
MC-32	ø 100 4"	97.0±0.3	108.5±0.5	380	NBG-32	10M

RCCN 日成MCL2型双扣金属软管 Liquid-Tight Metal Flexible Conduit

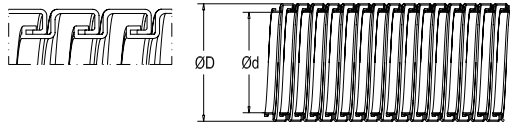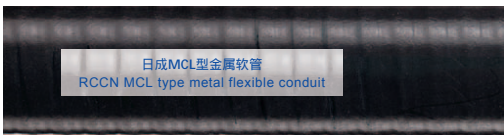

产品材质:(内层):热镀锌钢板及特殊绝缘处理。
 (外层):PVC(黑色抗紫外线,防老化)
 产品认证:欧洲CE,欧洲环保RoHS
 防火等级:UL94V-0,低烟无毒 颜色种类:黑色或灰色
 工作温度:-30 到+85 ,瞬间可耐热达100
 产品特性:1软管有极佳之防水,绝缘性,抗拉性
 2表面加厚层PVC被覆,外表平滑,且PVC塑料添加防火阻燃剂,并加抗UV紫外线和防止老化作用之成份。
 3结构为反扣型增加抗拉强度,不容易折断或变形。
 4具超柔软与极佳弯曲性能,内部平滑构造在穿引电线时极容易。
 应用领域:各种昂贵设备,发电厂,化工设备,输电系统,,基地台架设,及屋外露出部分之配线保护。
 使用方法:先将电线穿入管内,再配合金属软管固定头即可。
 用途:保护电线电缆以及达到绝缘,防水,并可增进线缆弯曲美观。

Material:(inner):zinc coated steel, special insulated processed.
 (outer):UL approved PVC
 Certificates:CE,ROHS
 Fireproof class:UL94V-2,low smoking,poison free Color:black, gray
 Work T.: -30 to +85 ,100 in a short time
 Products Characteristics:1.good waterproof,insulated ,retension
 2.PVC wrapped ,PVC is UV and inflammation resistant
 3.uneasy to break and construction changing, for its special design
 4 smooth inside, make the wire and cable install easily
 Use domain:railway,communicate project,air-dondition,machines.roboticized equipments,power plant ships and so on
 Use way:insert the cables into the conduit, then fix the correct connectors.

单位/Unit:mm

型号Item No.	规格 Trade Sizes	内径 I.D. d	外径 O.D. D	弯曲半径 Bending Radius mm±10%	配套金属头 Suitable metal connector NBG	包装 Packing M	
							公制 Metric ø
MCL2-03B	MCL2-03G	ø 10 1/4"	10.0±0.3	15.0±0.5	50	NBG-03	50M
MCL2-04B	MCL2-04G	ø 13 3/8"	12.5±0.3	17.5±0.5	60	NBG-04	50M
MCL2-05B	MCL2-05G	ø 16 1/2"	15.5±0.3	21.2±0.5	75	NBG-05	50M
MCL2-06B	MCL2-06G	ø 20 3/4"	20.0±0.3	26.0±0.5	100	NBG-06	30M
MCL2-08B	MCL2-08G	ø 25 1"	25.0±0.3	31.5±0.5	100	NBG-08	30M
MCL2-10B	MCL2-10G	ø 32 1 1/4"	32.0±0.3	39.5±0.5	135	NBG-10	20M
MCL2-12B	MCL2-12G	ø 38 1 1/2"	38.0±0.3	45.8±0.5	160	NBG-12	20M
MCL2-16B	MCL2-16G	ø 51 2"	51.0±0.3	60.0±0.5	190	NBG-16	10M
MCL2-20B	MCL2-20G	ø 64 2 1/2"	62.0±1.5	74.5±1.5	310	NBG-20	10M
MCL2-24B	MCL2-24G	ø 75 3"	73.0±2.0	85.5±2.0	350	NBG-24	10M
MCL2-32B	MCL2-32G	ø 100 4"	100.0±3.0	110.5±3.0	410	NBG-32	10M