



RCCN 日成HVDRF型环保阻燃线槽 Narrow Slot Wiring Duct



推荐/Recommend

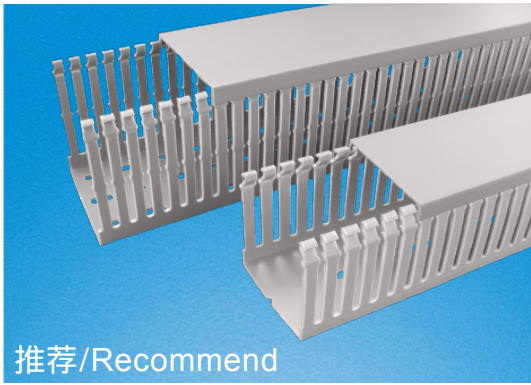

推荐：灰色为常规库存产品,其它颜色有起订量要求。
 Comment: gray is the common color, other color need more MOQ

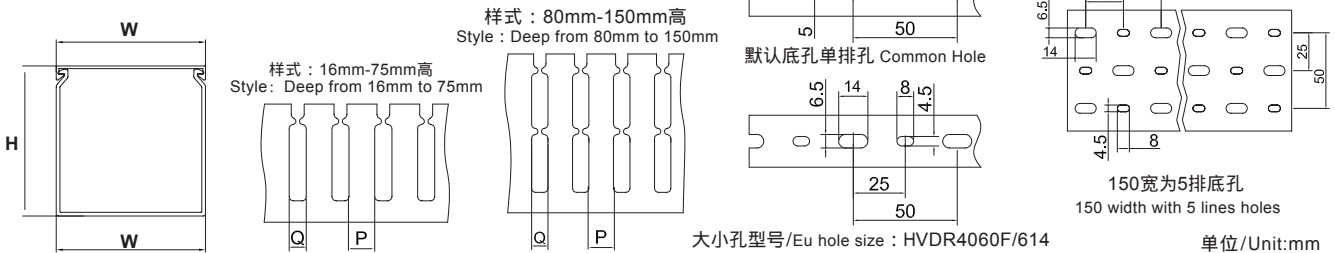

产品材质:采用低卤素硬质PVC料制成,环保无污染,不含铅等有毒物。
 产品认证:美国UL:E306674 欧洲CE 欧洲环保RoHS,REACH,铁道阻燃低烟。
 防火等级:UL94V-0,低烟微卤,遇火不燃烧,防火性及绝缘性特佳。
 产品构造:由槽底及槽盖组成,底槽两侧设有出线孔。
 颜色:灰色,白色,蓝色,黑色(可定制其它颜色,有起订量要求)
 工作温度:静态-40°C持续高温至65°C,短时间可达85°C。
 使用方法:先将底槽固定,将所要配的线装入槽内,盖上槽盖即可。
 产品特性:1.反扣式槽盖与槽体设计组合后绝不脱落,且接合面平滑,不割伤手及擦损附近配线。
 2.配线槽65°C内不易断裂,变形,变色,装配省时便利。
 3.出线孔低、组合容易、拆卸简单、易于配线。

更多选择:量大可按需求生产所需规格或定制长度.例:HVDR8080F(L=1.7M)
 Wide slot/finger design provides greater sidewall rigidity and can be used with a wide range of wire bundle sizes.
 Certificates:UL:E306674 CE:EN50085 RoHS,REACH. Made of rigid PVC
 Work temperature:-40 °c to 65 °c
 UL94 Flammability Rating of V-0
 Provided with mounting holes
 Available color:gray.white.blue.black and other special colors
 Special length come with MOQ request

大小孔型号/Eu hole size: HVDR4060F/614

单位/Unit:mm

型号 Item No.				宽×高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005	16×16	5	5	3~10pcs	每支 2米 含槽底槽盖
HVDR1616F	HVDR1616FW	HVDR1616FE	HVDR1616FB	25×16	5	5	8~12pcs	
HVDR2516F	HVDR2516FW	HVDR2516FE	HVDR2516FB	15×20	4	6	8~12pcs	
HVDR1520F	HVDR1520FW	HVDR1520FE	HVDR1520FB	20×20	4	6	10~20pcs	
HVDR2020F	HVDR2020FW	HVDR2020FE	HVDR2020FB	40×20	4	6	15~30pcs	
HVDR4020F	HVDR4020FW	HVDR4020FE	HVDR4020FB	15×25	5	5	5~15pcs	
HVDR1525F	HVDR1525FW	HVDR1525FE	HVDR1525FB	20×25	4	6	5~15pcs	
HVDR2025F	HVDR2025FW	HVDR2025FE	HVDR2025FB	25×25	4	6	10~25pcs	
HVDR2525F	HVDR2525FW	HVDR2525FE	HVDR2525FB	30×25	4	6	12~28pcs	
HVDR3025F	HVDR3025FW	HVDR3025FE	HVDR3025FB	40×25	4	6	20~35pcs	
HVDR4025F	HVDR4025FW	HVDR4025FE	HVDR4025FB	50×25	4	6	12~28pcs	
HVDR5025F	HVDR5025FW	HVDR5025FE	HVDR5025FB	15×30	4	6	8~15pcs	
HVDR1530F	HVDR1530FW	HVDR1530FE	HVDR1530FB	20×30	4	6	25~35pcs	
HVDR2030F	HVDR2030FW	HVDR2030FE	HVDR2030FB	25×30	4	6	25~35pcs	
HVDR2530F	HVDR2530FW	HVDR2530FE	HVDR2530FB	30×30	4	6	25~35pcs	
HVDR3030F	HVDR3030FW	HVDR3030FE	HVDR3030FB	40×30	4	6	30~40pcs	
HVDR4030F	HVDR4030FW	HVDR4030FE	HVDR4030FB	50×30	4	6	40~50pcs	
HVDR5030F	HVDR5030FW	HVDR5030FE	HVDR5030FB	60×30	4	6	50~60pcs	
HVDR6030F	HVDR6030FW	HVDR6030FE	HVDR6030FB	22×33	4	6	25~35pcs	
HVDR2233F	HVDR2233FW	HVDR2233FE	HVDR2233FB	33×33	4	6	35~45pcs	
HVDR3333F	HVDR3333FW	HVDR3333FE	HVDR3333FB	20×35	4	6	30~40pcs	
HVDR2035F	HVDR2035FW	HVDR2035FE	HVDR2035FB	35×35	4	6	35~45pcs	
HVDR3535F	HVDR3535FW	HVDR3535FE	HVDR3535FB	50×35	4	6	40~60pcs	
HVDR5035F	HVDR5035FW	HVDR5035FE	HVDR5035FB	15×40	4	6	16~22pcs	
HVDR1540F	HVDR1540FW	HVDR1540FE	HVDR1540FB	20×40	4	6	16~22pcs	
HVDR2040F	HVDR2040FW	HVDR2040FE	HVDR2040FB	25×40	4	6	20~35pcs	
HVDR2540F	HVDR2540FW	HVDR2540FE	HVDR2540FB	35×40	4	6	30~45pcs	
HVDR3540F	HVDR3540FW	HVDR3540FE	HVDR3540FB	40×40	4	6	60~70pcs	
HVDR4040F	HVDR4040FW	HVDR4040FE	HVDR4040FB	60×40	4	6	100~115pcs	
HVDR6040F	HVDR6040FW	HVDR6040FE	HVDR6040FB	80×40	4	6	120~135pcs	
HVDR8040F	HVDR8040FW	HVDR8040FE	HVDR8040FB	100×40	4	6	120~135pcs	
HVDR10040F	HVDR10040FW	HVDR10040FE	HVDR10040FB	120×40	4	6	140~155pcs	
HVDR12040F	HVDR12040FW	HVDR12040FE	HVDR12040FB					Pcs/Branch 2M Including turning and lids

RCCN 日成HVDRF型环保阻燃线槽 Narrow Slot Wiring Duct

型号 Item No.				宽×高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005					
HVDR2545F	HVDR2545FW	HVDR2545FE	HVDR2545FB	25×45	4	6	20~25pcs	每支 2米 含槽底槽盖
HVDR3345F	HVDR3345FW	HVDR3345FE	HVDR3345FB	33×45	4	6	40~55pcs	
HVDR4545F	HVDR4545FW	HVDR4545FE	HVDR4545FB	45×45	4	6	60~70pcs	
HVDR6545F	HVDR6545FW	HVDR6545FE	HVDR6545FB	65×45	4	6	110~120pcs	
HVDR2050F	HVDR2050FW	HVDR2050FE	HVDR2050FB	20×50	4	6	18~28pcs	
HVDR2550F	HVDR2550FW	HVDR2550FE	HVDR2550FB	25×50	4	6	20~30pcs	
HVDR3050F	HVDR3050FW	HVDR3050FE	HVDR3050FB	30×50	4	6	25~40pcs	
HVDR3550F	HVDR3550FW	HVDR3550FE	HVDR3550FB	35×50	4	6	40~60pcs	
HVDR4050F	HVDR4050FW	HVDR4050FE	HVDR4050FB	40×50	4	6	60~70pcs	
HVDR4550F	HVDR4550FW	HVDR4550FE	HVDR4550FB	45×50	4	6	70~80pcs	
HVDR5050F	HVDR5050FW	HVDR5050FE	HVDR5050FB	50×50	4	6	80~90pcs	
HVDR5550F	HVDR5550FW	HVDR5550FE	HVDR5550FB	55×50	4	6	85~95pcs	
HVDR6050F	HVDR6050FW	HVDR6050FE	HVDR6050FB	60×50	4	6	100~120pcs	
HVDR7550F	HVDR7550FW	HVDR7550FE	HVDR7550FB	75×50	4	6	150~170pcs	
HVDR8050F	HVDR8050FW	HVDR8050FE	HVDR8050FB	80×50	4	6	160~180pcs	
HVDR10050F	HVDR10050FW	HVDR10050FE	HVDR10050FB	100×50	4	6	200~250pcs	
HVDR12555F	HVDR12555FW	HVDR12555FE	HVDR12555FB	125×55	4	6	220~270pcs	
HVDR2060F	HVDR2060FW	HVDR2060FE	HVDR2060FB	20×60	4	6	35~45pcs	
HVDR2560F	HVDR2560FW	HVDR2560FE	HVDR2560FB	25×60	4	6	40~50pcs	
HVDR3060F	HVDR3060FW	HVDR3060FE	HVDR3060FB	30×60	4	6	60~80pcs	
HVDR3560F	HVDR3560FW	HVDR3560FE	HVDR3560FB	35×60	4	6	90~105pcs	
HVDR4060F	HVDR4060FW	HVDR4060FE	HVDR4060FB	40×60	4	6	100~115pcs	
HVDR4560F	HVDR4560FW	HVDR4560FE	HVDR4560FB	45×60	4	6	110~125pcs	
HVDR5060F	HVDR5060FW	HVDR5060FE	HVDR5060FB	50×60	4	6	120~135pcs	
HVDR6060F	HVDR6060FW	HVDR6060FE	HVDR6060FB	60×60	4	6	120~135pcs	
HVDR8060F	HVDR8060FW	HVDR8060FE	HVDR8060FB	80×60	4	6	180~210pcs	
HVDR10060F	HVDR10060FW	HVDR10060FE	HVDR10060FB	100×60	4	6	240~290pcs	
HVDR11060F	HVDR11060FW	HVDR11060FE	HVDR11060FB	110×60	4	6	250~300pcs	
HVDR12060F	HVDR12060FW	HVDR12060FE	HVDR12060FB	120×60	4	6	260~320pcs	
HVDR15060F	HVDR15060FW	HVDR15060FE	HVDR15060FB	150×60	4	6	300~360pcs	
HVDR2565F	HVDR2565FW	HVDR2565FE	HVDR2565FB	25×65	4	6	40~50pcs	
HVDR3365F	HVDR3365FW	HVDR3365FE	HVDR3365FB	33×65	4	6	40~70pcs	
HVDR4565F	HVDR4565FW	HVDR4565FE	HVDR4565FB	45×65	4	6	110~120pcs	
HVDR6565F	HVDR6565FW	HVDR6565FE	HVDR6565FB	65×65	4	6	180~200pcs	
HVDR7265F	HVDR7265FW	HVDR7265FE	HVDR7265FB	72×65	4	6	180~230pcs	
HVDR2575F	HVDR2575FW	HVDR2575FE	HVDR2575FB	25×75	4	6	180~210pcs	
HVDR3575F	HVDR3575FW	HVDR3575FE	HVDR3575FB	35×75	4	6	180~210pcs	
HVDR5075F	HVDR5075FW	HVDR5075FE	HVDR5075FB	50×75	4	6	180~210pcs	
HVDR7575F	HVDR7575FW	HVDR7575FE	HVDR7575FB	75×75	4	6	200~240pcs	
HVDR10075F	HVDR10075FW	HVDR10075FE	HVDR10075FB	100×75	4	6	250~290pcs	
HVDR2580F	HVDR2580FW	HVDR2580FE	HVDR2580FB	25×80	4	6	100~120pcs	
HVDR3080F	HVDR3080FW	HVDR3080FE	HVDR3080FB	30×80	4	6	110~125pcs	
HVDR3580F	HVDR3580FW	HVDR3580FE	HVDR3580FB	35×80	4	6	110~130pcs	
HVDR4080F	HVDR4080FW	HVDR4080FE	HVDR4080FB	40×80	4	6	140~160pcs	
HVDR4580F	HVDR4580FW	HVDR4580FE	HVDR4580FB	45×80	4	6	140~160pcs	
HVDR5080F	HVDR5080FW	HVDR5080FE	HVDR5080FB	50×80	4	6	160~180pcs	
HVDR5580F	HVDR5580FW	HVDR5580FE	HVDR5580FB	55×80	4	6	160~180pcs	
HVDR6080F	HVDR6080FW	HVDR6080FE	HVDR6080FB	60×80	4	6	180~210pcs	
HVDR8080F	HVDR8080FW	HVDR8080FE	HVDR8080FB	80×80	4	6	240~290pcs	
HVDR10080F	HVDR10080FW	HVDR10080FE	HVDR10080FB	100×80	4	6	260~350pcs	
HVDR12080F	HVDR12080FW	HVDR12080FE	HVDR12080FB	120×80	4	6	280~380pcs	
HVDR14080F	HVDR14080FW	HVDR14080FE	HVDR14080FB	140×80	4	6	350~450pcs	
HVDR16080F	HVDR16080FW	HVDR16080FE	HVDR16080FB	160×80	4	6	450~550pcs	
HVDR25100F	HVDR25100FW	HVDR25100FE	HVDR25100FB	25×100	4	6	110~160pcs	
HVDR33100F	HVDR33100FW	HVDR33100FE	HVDR33100FB	33×100	4	6	130~165pcs	
HVDR40100F	HVDR40100FW	HVDR40100FE	HVDR40100FB	40×100	4	6	130~175pcs	
HVDR50100F	HVDR50100FW	HVDR50100FE	HVDR50100FB	50×100	4	6	220~250pcs	
HVDR60100F	HVDR60100FW	HVDR60100FE	HVDR60100FB	60×100	4	6	240~290pcs	
HVDR70100F	HVDR70100FW	HVDR70100FE	HVDR70100FB	70×100	4	6	250~340pcs	
HVDR75100F	HVDR75100FW	HVDR75100FE	HVDR75100FB	75×100	4	6	260~350pcs	
HVDR80100F	HVDR80100FW	HVDR80100FE	HVDR80100FB	80×100	4	6	260~350pcs	
HVDR100100F	HVDR100100FW	HVDR100100FE	HVDR100100FB	100×100	4	6	300~400pcs	
HVDR120100F	HVDR120100FW	HVDR120100FE	HVDR120100FB	120×100	4	6	350~450pcs	
HVDR150100F	HVDR150100FW	HVDR150100FE	HVDR150100FB	150×100	4	6	400~650pcs	
HVDR160100F	HVDR160100FW	HVDR160100FE	HVDR160100FB	160×100	4	6	500~750pcs	
HVDR100130F	HVDR100130FW	HVDR100130FE	HVDR100130FB	100×130	4	6	350~450pcs	
HVDR150130F	HVDR150130FW	HVDR150130FE	HVDR150130FB	150×130	4	6	400~500pcs	
HVDR200100F	HVDR200100FW	HVDR200100FE	HVDR200100FB	200×100	4	6	600~800pcs	
HVDR200150F	HVDR200150FW	HVDR200150FE	HVDR200150FB	200×150	4	6	900~1200pcs	
HVDR200200F	HVDR200200FW	HVDR200200FE	HVDR200200FB	200×200	4	6	1200~1600pcs	


 Pcs/Branch
2M

Including training and lids

 Pcs/Branch
2M

Including training and lids

RCCN 日成HVDRF型环保阻燃线槽 Narrow Slot Wiring Duct

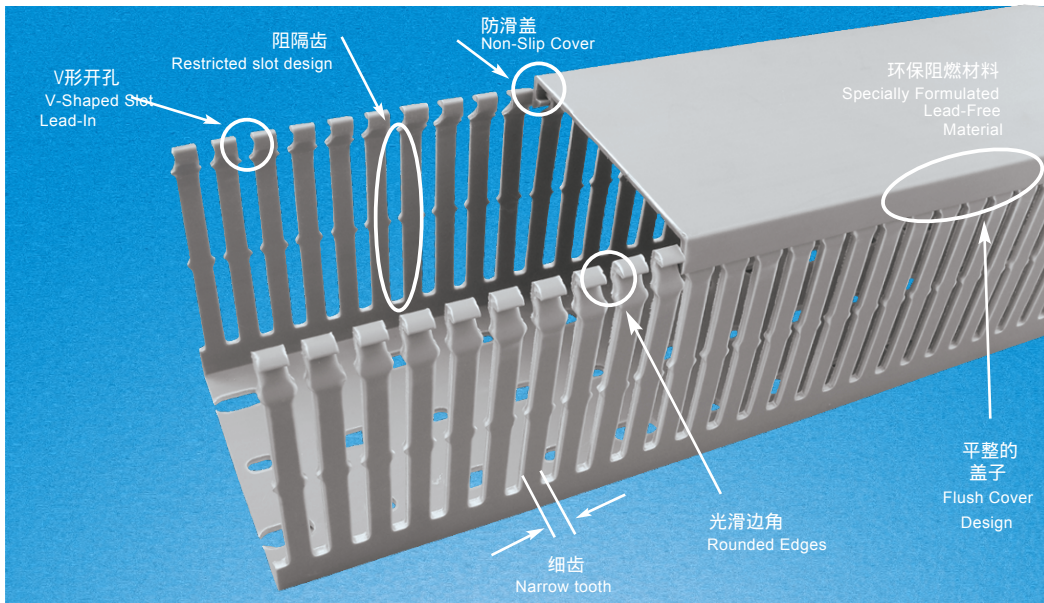

特点/Features	优点/Advantages	益处/Benefits
细的齿和细的孔 Narrow finger and slot design	较近的电器接线空间满足高密度排线 Allows further fanning of wires for neater wire	允许更多的排线,使布线效果整体美观 Mmanagement in high-density control panels
环保阻燃材料 Rohs approved Enviroment-friendly Material	符合欧盟ROHS环保测试, 符合美国UL94V-0,良好的阻燃性 Approved by EU Rohs, Compliant with US UL 94V-0,good inflaming	环保不含有铅的PVC 不会对人体健康构成危害,材料良好阻燃性, 使明火自熄,在着火的情况下,保证安全 Eliminates health concerns associated with PVC that contains lead
光滑的边角 Smooth rounded edges	齿的顶端和孔的边缘光滑 Smooth edges in duct slots and at top of duct fingers	防止电线和手被毛刺割伤 Protects hands and wiring/cabling from abrasion
防滑盖 non-slip liner inside duct covers)	安装时不容易滑盖 Will not slide easily when installed on duct base	防运输振动导致滑盖 防线槽垂直安装时滑盖 Cover stays in place during shipment, vibration and when in a vertical orientation,eliminating rework
平整的盖子设计 Flush cover designGreater capacity than traditional duct designs	比传统的设计有更大的空间 盖子与槽体齐平 Cover sits flush with sidewall	比老款装相同数量的电线表面更平整美观 Can potentially use a smaller size wiring duct for same number of wires Provides a neat and finished appearance
冲孔断面/Slot smooth	冲孔后齿的表面平整光滑 Smooth edge after punching	不用修毛刺,节省时间 No need to get offer abrasion, save time
V型开孔设计 V-shaped slot lead-in V-shape funnels wires into slot for	V型槽孔使电线更易装入 Easier insertion	加快电线安装 Speeds wire installation
阻隔齿设计 Restricted slot designOnce inserted wires are retained in the slot	电线装入后不会晃动,不管是否扣盖子 也可用于电线功能不同的分类 with or without the cover being installed	安装时避免线跑出槽不必要的麻烦,节省时间 Eliminates hassle and saves time during installation and maintenance
四种颜色可选 Four different colors	可用于不同场合的安装要求。 Suitable to different environments using	项目对颜色有要求时选择范围更加的广泛更快的满足终端用户的需求。 Can meet different customers'request in different project
通过多项认证 Approved by many certificates	美国UL,加拿大CULUS, 欧盟CE ,ROHS,REACH 铁道部机车阻燃低烟认证。 America UL,Canada CULUS, EuropeCE ,ROHS,REACH Flamility and low smoking certificate	满足项目应用零配件需要提供产品认证,确保产品在世界各地均可放心使用 Can provide related certificates of the projects or parts need



